

Certikin
international ltd

HYDROSWIM FILTERS

FEATURES



- Laminated polyester filter
- Made in France
- Range of 4 models
20" (520mm) side & top mount
25" (640mm) side & top mount
30" (760mm) side & top mount
36" (900mm) side mount only
- Filters with a 6 way multiport valve (filtration, backwashing, rinsing, recycling, draining and closing)
- Complete with pressure gauge, airbleed system and large diameter cover



- Filtres polyester laminés
- Produits 100% français
- Gamme composée de 4 modèles
Ø 520
Ø 640
Ø 760
Ø 900
- Filtres équipés d'une vanne de sélection latérale 6 voies manuelle ou automatique (filtration, lavage, rinçage, recyclage, vidange et fermeture).
- Manomètre purgeur d'air et couvercle grand diamètre




- Filtros de polyester laminados
- Productos fabricados enteramente en Francia
- 4 modelos componen nuestra gama
Ø 520
Ø 640
Ø 760
Ø 900
- Filtros equipados de una válvula selectora lateral 6 vías manual o automática (filtración, lavado, enjuague, reciclado, desagüe y cierre)
- Manómetro, purgador y tapa de gran diametro



SPECIFICATIONS

- Laminated polyester filter, complete with 6 way valve, pressure gauge, air bleed and large bolt down lid
- Recommended operating pressure: 0.5-1.6bar
- Maximum operating pressure: 2.5bar
- Test Pressure: 4bar - (each model tested for 20,000 cycles)
- Maximum operating temperature: 50°C
- Colour: Yellow

DIMENSIONS

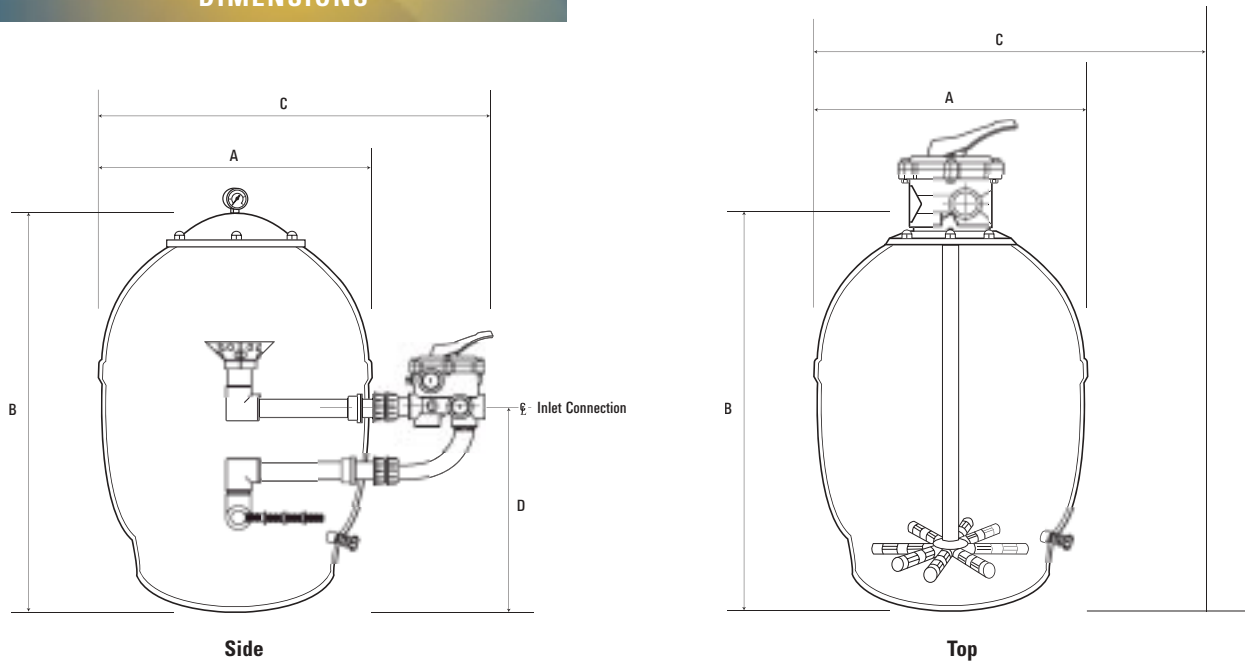

	Code	Diameter (inches) (A)	Diameter (mm) (A)	Connections (inches)	Flow 50m ² /h/m ²	Gravel (kg)	Sand (kg)	Weight (kg)	Height (mm) (B)	Width Inc Valve (mm) (C)	Height to Valve (mm) (D)
Side	HS520	20	520	1.5	10	25	75	18	855	810	448
	HS640	25	640	1.5	15	50	100	23	920	930	450
	HS760	30	760	2	22	50	175	34	1070	1090	527
	HS900	36	900	2	33	75	250	43	1095	1230	475
Top	HS520/T	20	520	1	10	25	75	17	960	530	790
	HS640/T	25	640	1.5	15	50	100	22	1050	650	870
	HS760/T	30	760	2	22	50	175	33	1240	770	1025

If you should require further technical information please do not hesitate to contact us.

